


SUPER REEVE CONNECTOR SOCKET WITH BOLT AND NUT

QUENCHED AND TEMPERED CAST STEEL

SOCKETS

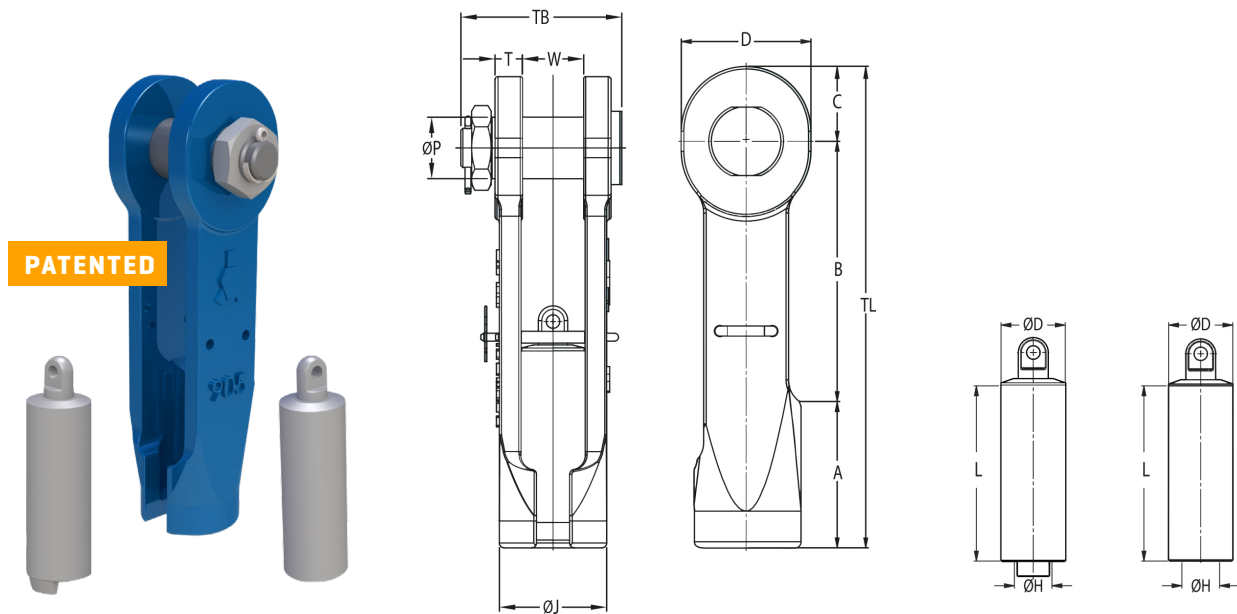

| Model No. | MBL (UStons) | for wire ø | | Dimensions (inch) | | | | | | | | | | | | | Weight (lbs) |
|--------------|--------------|------------|---------------|-------------------|-------|------|------|------|------|------|------|------|------|-------|-------|-------|--------------|
| | | (mm) | (inch) | A | B | C | øH | øP | T | W | D | øD | øJ | L | TB | TL | |
| SCS 901 B | 22 | 11-13 | 7/16 - 1/2 | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| SCS 902 B | 28 | 13-16 | 1/2 - 5/8 | 3.35 | 5.24 | 1.26 | 0.75 | 1.18 | 0.55 | 1.26 | 2.28 | 1.26 | 2.20 | 3.86 | 3.78 | 9.84 | 7 |
| SCS 903 B | 44 | 16-19 | 5/8 - 3/4 | 3.54 | 6.30 | 1.57 | 0.87 | 1.38 | 0.63 | 1.50 | 2.76 | 1.57 | 2.56 | 4.49 | 4.21 | 11.42 | 11 |
| SCS 904 B | 61 | 20-22 | 7/8 | 4.21 | 7.24 | 1.77 | 1.00 | 1.61 | 0.75 | 1.73 | 3.15 | 1.73 | 3.03 | 5.12 | 4.84 | 13.23 | 17 |
| SCS 905 B | 83 | 23-26 | 1 | 4.53 | 8.31 | 2.36 | 1.20 | 1.97 | 0.87 | 2.01 | 4.09 | 2.05 | 3.46 | 5.59 | 5.43 | 15.20 | 26 |
| SCS 906 B | 99 | 27-29 | 1 1/8 | 5.51 | 8.46 | 2.56 | 1.34 | 2.24 | 0.98 | 2.24 | 4.49 | 2.28 | 3.78 | 6.26 | 6.30 | 16.54 | 35 |
| SCS 907 B | 138 | 30-32 | 1 1/4 | 5.91 | 10.24 | 2.87 | 1.43 | 2.48 | 1.10 | 2.48 | 4.96 | 2.52 | 4.33 | 6.97 | 6.50 | 19.02 | 51 |
| SCS 908 B | 138 | 33-36 | 1 3/8 | 6.69 | 10.24 | 2.87 | 1.56 | 2.52 | 1.10 | 2.72 | 4.96 | 2.68 | 4.49 | 7.76 | 7.28 | 19.80 | 55 |
| SCS 902 B.SR | 28 | 13-16 | 1/2 - 5/8 | 3.35 | 5.24 | 1.26 | 0.75 | 1.18 | 0.55 | 1.26 | 2.28 | 1.26 | 2.20 | 3.86 | 3.78 | 9.84 | 7 |
| SCS 903 B.SR | 44 | 16-19 | 5/8 - 3/4 | 3.54 | 6.30 | 1.57 | 0.87 | 1.38 | 0.63 | 1.50 | 2.76 | 1.57 | 2.56 | 4.49 | 4.21 | 11.42 | 11 |
| SCS 904 B.SR | 61 | 20-22 | 7/8 | 4.21 | 7.24 | 1.77 | 1.00 | 1.61 | 0.75 | 1.73 | 3.15 | 1.73 | 3.03 | 5.12 | 4.84 | 13.23 | 17 |
| SCS 905 B.SR | 83 | 23-26 | 1 | 4.53 | 8.31 | 2.36 | 1.20 | 1.97 | 0.87 | 2.01 | 4.09 | 2.05 | 3.46 | 5.59 | 5.43 | 15.20 | 26 |
| SCS 906 B.SR | 99 | 27-29 | 1 1/8 | 5.51 | 8.46 | 2.56 | 1.34 | 2.24 | 0.98 | 2.24 | 4.49 | 2.28 | 3.78 | 6.26 | 6.30 | 16.54 | 35 |
| SCS 907 B.SR | 138 | 30-32 | 1 1/4 | 5.91 | 10.24 | 2.87 | 1.43 | 2.48 | 1.10 | 2.48 | 4.96 | 2.52 | 4.33 | 6.97 | 6.50 | 19.02 | 51 |
| SCS 908 B.SR | 138 | 33-36 | 1 3/8 | 6.69 | 10.24 | 2.87 | 1.56 | 2.52 | 1.10 | 2.72 | 4.96 | 2.68 | 4.49 | 7.76 | 7.28 | 19.80 | 55 |
| SCS 909 B.SR | 165 | 37-39 | 1 1/2 | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| SCS 910 B.SR | 187 | 40-42 | 1 5/8 | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| SCS 911 B.SR | 248 | 43-48 | 1 3/4 - 1 7/8 | - | - | - | - | - | - | - | - | - | - | - | - | - | - |
| SCS 912 B.SR | 309 | 49-54 | 2 - 2 1/8 | 8.86 | 14.69 | 4.25 | 2.36 | 3.74 | 1.77 | 3.98 | 7.64 | 4.13 | 7.28 | 11.02 | 10.35 | 27.80 | 205 |

MBL = Minimum Breaking Load

- The standard finish of the sockets is blue primer coating and hot dipped galvanized.
- All sockets are provided with an EN 10204-2.1 declaration of conformity and EN 10204-3.1 material certificate.
- Dimensional tolerances are ±5% for the jaw opening (W) and pin diameter (øP).
- For other dimensional tolerances please contact Ropeblock.
- Surface finish e.g. hot dip galvanizing or paint may add to the overall thickness and fork distance.



SEE OUR WARNING AND SAFETY INFORMATION ON PAGE 136

